

Technical information sheet **UPV**

1. Physical properties

Specifications	Test method	unit	amount
1. Density	1.04	g/cm	ISO 11183
2. Absorption b	0.2	%	ISO 62
3. Chemical resistance	DIN 8061		-
4. The maximum temperature allowed for the test (without the intervention of stronger mechanical pressure)	-	-	-
5. Temperature range with Ia	60	°C	-

2. Mechanical characteristics

1. Tensile strength in performance	ISO 527	MPa	55
2. Tension in performance	ISO 527	%	3
3. Tensile strength at failure point	ISO 527	MPa	30
4. Tensile at failure point	ISO 527	%	10 >
5. Impact resistance e	ISO 179	KJ/m2	No break
6. Shock resistance f	ISO 179	KJ/m2	3
7. Bullet indentation/rock hardness L	ISO 2039 1	MPa	120
8. candle D	DIN 53505		82
9. Bending strength	ISO 178	MPa	90
10. Modulus of elasticity e	ISO 527	MPa	3000

3. Thermal senses

1. Vicat softening point VST/B/5	ISO 306	°C	)157
VST/A/50	ISO 306	°C	-
2. Bending heat temperature HDT / B	ISO 75	°C	)227
HDT/A	ISO 75	°C	-
3. Coefficient of thermal expansion of the line	DIN 53752	K-1×10-4	0.8
4. Thermal conductivity at 20°C	DIN 53752	W/(m×k)	0.14

+98-2166698027

+98-2166698089

www.bazargani-falahati.com

info@bazargani-falahati.com

Tehran, Ahan Bazaar, Shad Abad
 17 Shahrivar Commercial Complex
 Block Ad, inside 45 meters




4. Electrical senses

1. Hajj resistance m	VDE 0303	$\Omega \times \text{CM}$	>1015
2. Level resistance h	-	Ω	≥ 1013
3. Dielectric constant in MHz 1	-	-	3
4 Dielectric loss factor in MHz 1	DIN 53483	-	0.01
5. Dielectric strength k	VDE 0303	kV/mm	20-40
6. Strength of creep flow	IEC 60112	-	KB 600

5. Additional data

1. Sticking	-	-	+
2. Coefficient K	DIN 53375	-	0.6
3. Ishta'a I	UL 94	-	V-0
4. UV stabilizer	-	-	Fair

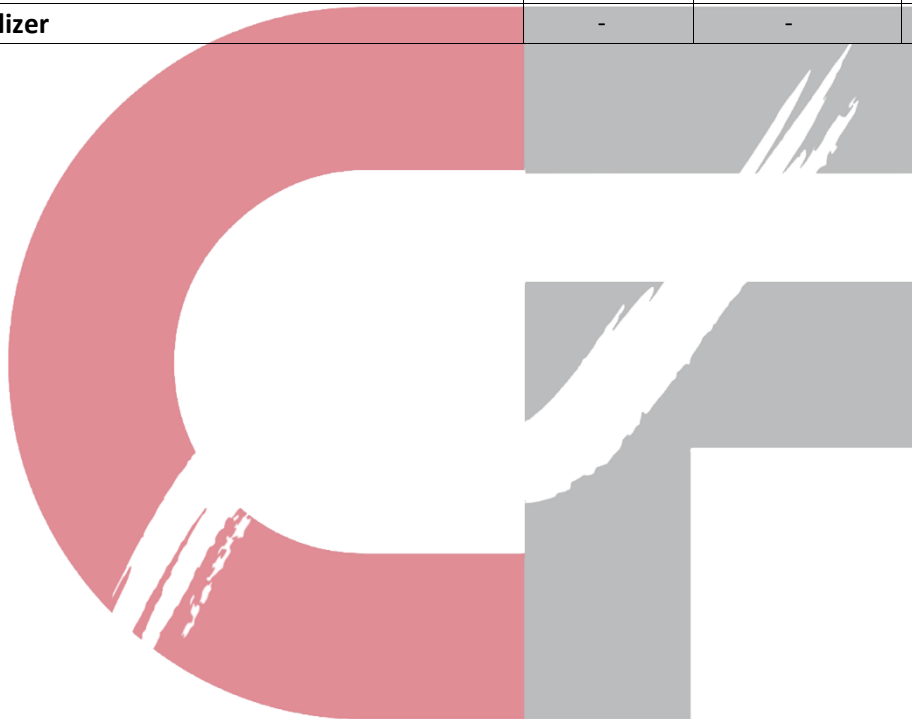

+98-2166698027
+98-2166698089

www.bazargani-falahati.com
info@bazargani-falahati.com

Tehran, Ahan Bazaar, Shad Abad
17 Shahrivar Commercial Complex
Block Ad, inside 45 meters

